

SAND SPREADERS
PS-250 / 250M



Adjustment of spreading width.

Sand container can be 250 or 500 litres of capacity

SAND SPREADER	PS-250	PS-250M	
Load capacity	300	600	[kg]
Tank capacity	250	500	[l]
Power demand	15 (11)	15 (11)	[HP (kW)]
Spreading width	1 - 6	1 - 6	[m]
Mounting on tractor	3pt hitch cat. I or II narrow		

SELF-LOADING SPREADER
HZS10 / HZW150 / HZW200



HZS10



HZW200

HZS10 - stainless steel spreading disc.

Additional mixer facilitates aggregate breaking

HZW200 - working roller with slats dispense the material on the road.

Mixer for easy material slip onto the roller.



SELF-LOADING SPREADER	HZS10	HZW150	HZW200	
Tank capacity	1	0.8	1	[m ³]
Spreading width	2 - 6	1,5	2	[m]
Power supply	Hydraulic	PTO or hydraulic	PTO or hydraulic	
PTO nom. Speed		540	540	[rpm]
Nom. tractor hydraulic output	40	30	30	[l/min]
Weight	555	425	500	[kg]




TRAILED SAND SPREADERS
T130 / T131 / T132



T130



T131

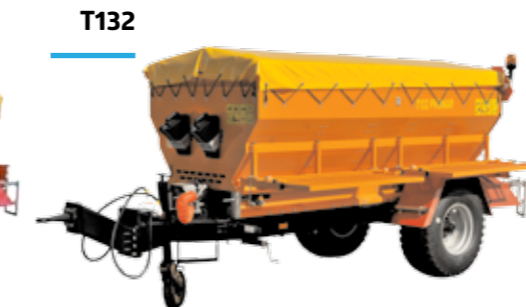

T132

TRAILED SAND SPREADER	T130	T131	T132	
Carrying capacity	2500	3800	5500	[t]
Loadbox capacity	2	3	4	[m ³]
Spreading width	1800 - 2800	1800 - 2800	1800 - 2800	[mm]
Minimum tractor power demand	48 (35)	60 (44)	70 (51)	[HP (kW)]
Minimum hydraulic system output	32	32	32	[l/min]



TRAILED SAND SPREADER
KCT07

TRAILED SAND SPREADER	KCT07	
Load capacity	1100	[kg]
Tank capacity	0,7	[m ³]
Spreading width	1,5 - 4	[m]
Min. power requirement	20 (14,7)	[KM (kW)]
Max. working speed	15	[km/h]
Recommended PTO speed (mechanical version)	300	[rpm]
Max. hydraulic pressure (hydraulic version)	20	[MPa]
Nominal oil flow (hydraulic version)	16-50	[l/min]
Weight	345	[kg]



The spreader's wheel drives the conveyor belt while riding. The given spreading amount will be the same, regardless of the moving speed. The spreader is not working while stationary.

Sieve for better material comminutement

PTO drive for tractors without hydraulic system.



PRONAR Sp. z o.o.
17-210 Narew, Poland
ul. Mickiewicza 101A

tel.: +48 85 682 72 16
+48 85 682 72 65
fax: +48 85 682 71 91

pronar.pl
municipal.export@pronar.pl



Technology for nature



WINTER ROAD MAINTENANCE
EQUIPMENT FOR TRACTOR

- SNOW PLOWS
- SNOW BLOWERS'
- SALT SPREADERS



SNOW PLOUGHS
PU-2200E / PU-1400 / 2600 / PU-3300

PU-2200E



PU-1400



PU-3300




SNOW PLOUGH	PU-2200E	PU-1400	PU-2600	PU-3300	
Working width - straight	2190	1400	2600	3300	[mm]
- at max. turn angle	1930	1260	2300	2900	
Max. frame turn angle	28	25	30	30	[°]
Working height	835	600	1040	1040	[mm]
Weight	360	175	660	680	[kg]
Power demand	up to 60 (44)	up to 30 (22)	80-150 (59-110)	80-150 (59-110)	[HP (kW)]
Working speed max.	10	10	10	10	[kph]



Segmented mouldboard with spring safeguard.

SNOW PLOUGHS
KACPER PU-1700 / 2100

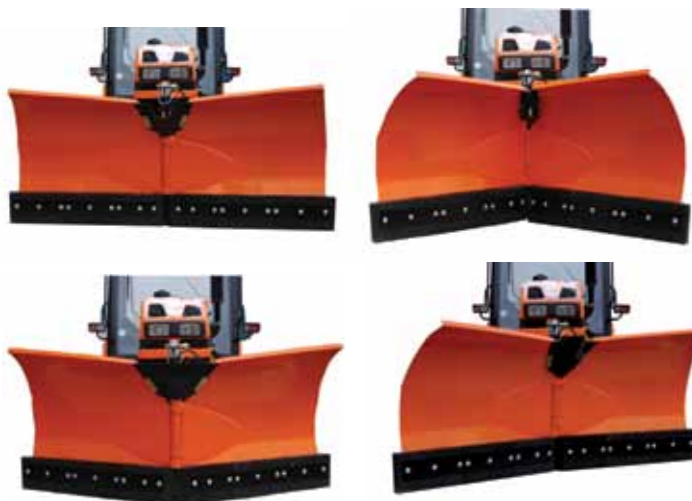

SNOW PLOUGH	Kacper PU-1700	Kacper PU-2100	
Working width - straight	2080	2380	[mm]
- at max. turn angle	1870	2100	
Max. frame turn angle	30	30	[°]
Working height	900	900	[mm]
Weight	280	300	[kg]
Power demand	25-55 (15-40)	25-55 (15-40)	[HP (kW)]
Working speed max.	10	10	[kph]



PU 1700 and PU 2100 are available with supporting skids, supporting wheels or without support.

SNOW PLOUGHS
PUV-2600 / 2800 / 3000 / 3300

PUV-2800



PUV-3300



SNOW PLOUGH	PUV-2600	PUV-2800	PUV-3000	PUV-3300	
Working width - straight	2600	2800	3000	3300	[mm]
- at max. turn angle	2320	2490	2660	2930	
Max. frame turn angle	27	27	27	27	[°]
Working height	835	835	935	935	[mm]
Weight	600	650	800	850	[kg]
Power demand	80-150 (59-110)	80-150 (59-110)	100-200 (74-147)	100-200 (74-147)	[HP (kW)]
Working speed max.	10	10	10	10	[kph]



PUV 3300 model at work - removing the snow to the side.



PUV 2800 model at work in Y position -pushing the snow forward



PUV 3300 working with 30 degree angle

SNOW PLOUGHS
PUV-1350 M / 1500M / 2000M / 2600M / 2800M / 3000M / 3300M / 3600HD / 4000HD

PUV-2600M



Municipal set - snow plow PUV 3000M and salt spreader HZ5 10

SNOW PLOUGH	PUV-1350M	PUV-1500M	PUV-1800M	PUV-2000M	PUV-2600M	PUV-2800M	PUV-3000M	PUV-3300M	PUV-3600HD	PUV-4000HD	
Working width - straight	1350	1500	1800	2000	2630	2830	3010	3305	3680	4000	[mm]
- at max. turn angle	1190	1325	1580	1750	2210	2370	2520	2710	3040	3280	
Max. frame turn angle	30	30	30	30	33	33	33	35	35	35	[°]
Working height	625	635	655	670	855	865	880	1015	1120	1206	[mm]
Weight	131	140	173	183	680	700	730	860	1025	1270	[kg]
Power demand	30 (22)	30 (22)	50 (37)	50 (37)	80-150 (59-110)	80-150 (59-110)	80-150 (59-110)	100-200 (74-147)	110-220 (81-162)	120-250 (88-183)	[kW]
Working speed max.	10	10	10	10	10	10	10	10	10	10	[km/h]

SNOW BLOWERS
OW1.5 / OW 2.1 / OW 2.4

OW1.5



OW 2.1



OW2.4



SNOW BLOWERS	OW 1.5	OW 2.1	OW 2.4	
Weight	320	600 (737)	740 (830)	[kg]
Working width	1500	2100	2330	[mm]
Working height	580	780	780	[mm]
Number of augers	1	1	2	
Required tractor PTO speed (left or right)	540 or 1000	540 or 1000	540 or 1000	[rpm]
Discharge distance	5 - 20	5 - 30	5 - 30	[m]
PTO power demand	25-60 (18-44)	50-95 (37-70)	70-150 (51-110)	[HP (kW)]
Working pressure*	-	25	25	[MPa]
Demanded oil output*	-	100 - 140	135 - 195	[l/min]

* for snowblower with hydraulic drive



SNOW BLOWER
OFW 2.6

Rotary chute made of wear-resistant steel allows change of throwing distance



Rotor made of wear-resistant steel.

Steel blades for breaking away snow from the ground. Working width 2.6m.



Skids or supporting wheels

SNOW-CUTTER-BLOWER	OFW2.6	
Weight	1700	[kg]
Clearing width	2600	[mm]
Working height	1240	[mm]
Required tractor PTO speed (left or right)	1000	[rpm]
PTO power demand	140 (103)	[HP (kW)]
Discharge distance	5 - 30	[m]
Auger diameter	950	[mm]
Rotor diameter	900	[mm]



Angle gearbox with overload protection